
Loewe Satellite Speaker

Delivery contents Two Satellite Speakers W 6.2/H 15.0/PD 6.2



Dimensions in cm: W = Width, H = Height, PD = Product Depth, DB = Diameter/Dimensions of Base plate

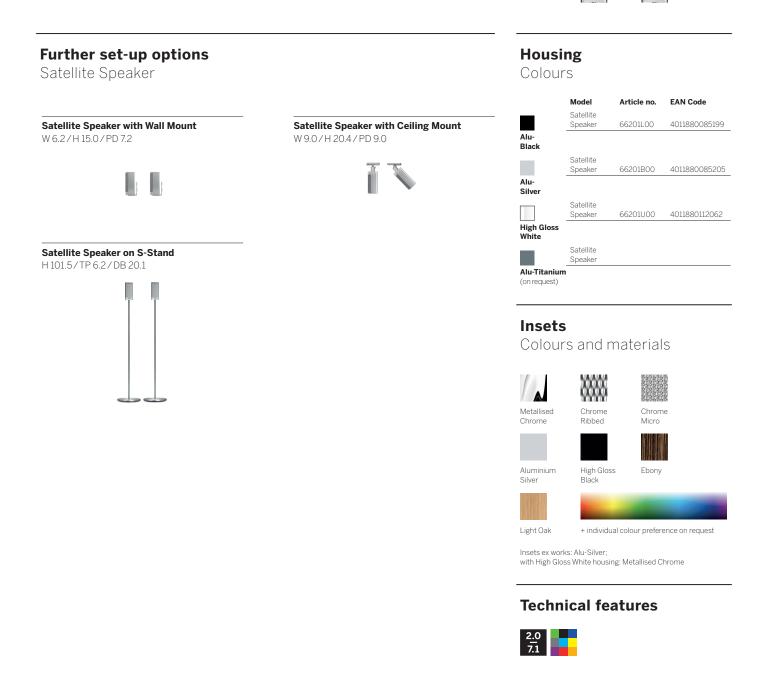

Technical information

Loewe Satellite Speaker

General		
Principle	1-way closed	
Nominal/music power handling (sine/max.)	50 W / 50 W	
Frequency range	160 Hz – 20 kHz (- 6 dB)	
Acoustic pressure at 1 W	85 dB (at a distance of 1 metre)	
Impedance	8 ohms	
Power consumption of power supply unit	_	
Power consumption in stand-by mode	_	
Features		
Speaker complement	2 full-range speakers	
	Speaker terminals (max. 1.5 mm)	
Speaker connections		
Power supply unit connection	_	
Accessories		
Wall Mount	_	
Standard inset / Dimensions (W x D) in cm	Alu-Silver ¹ /5.5 x 5.5	
Speaker cable	•	-
Loudspeaker grille	•	
Plug-in power supply (12 V / 300 mA)		
Miscellaneous		
Weight (approx.) in kg	0.7	

• = included/installed • = upgradeable/optional ¹ With High Gloss White housing: Metallised Chrome.